


Classique Wilton™

UC FLOOR





Pattern Repeat: 80 cm x 80 cm

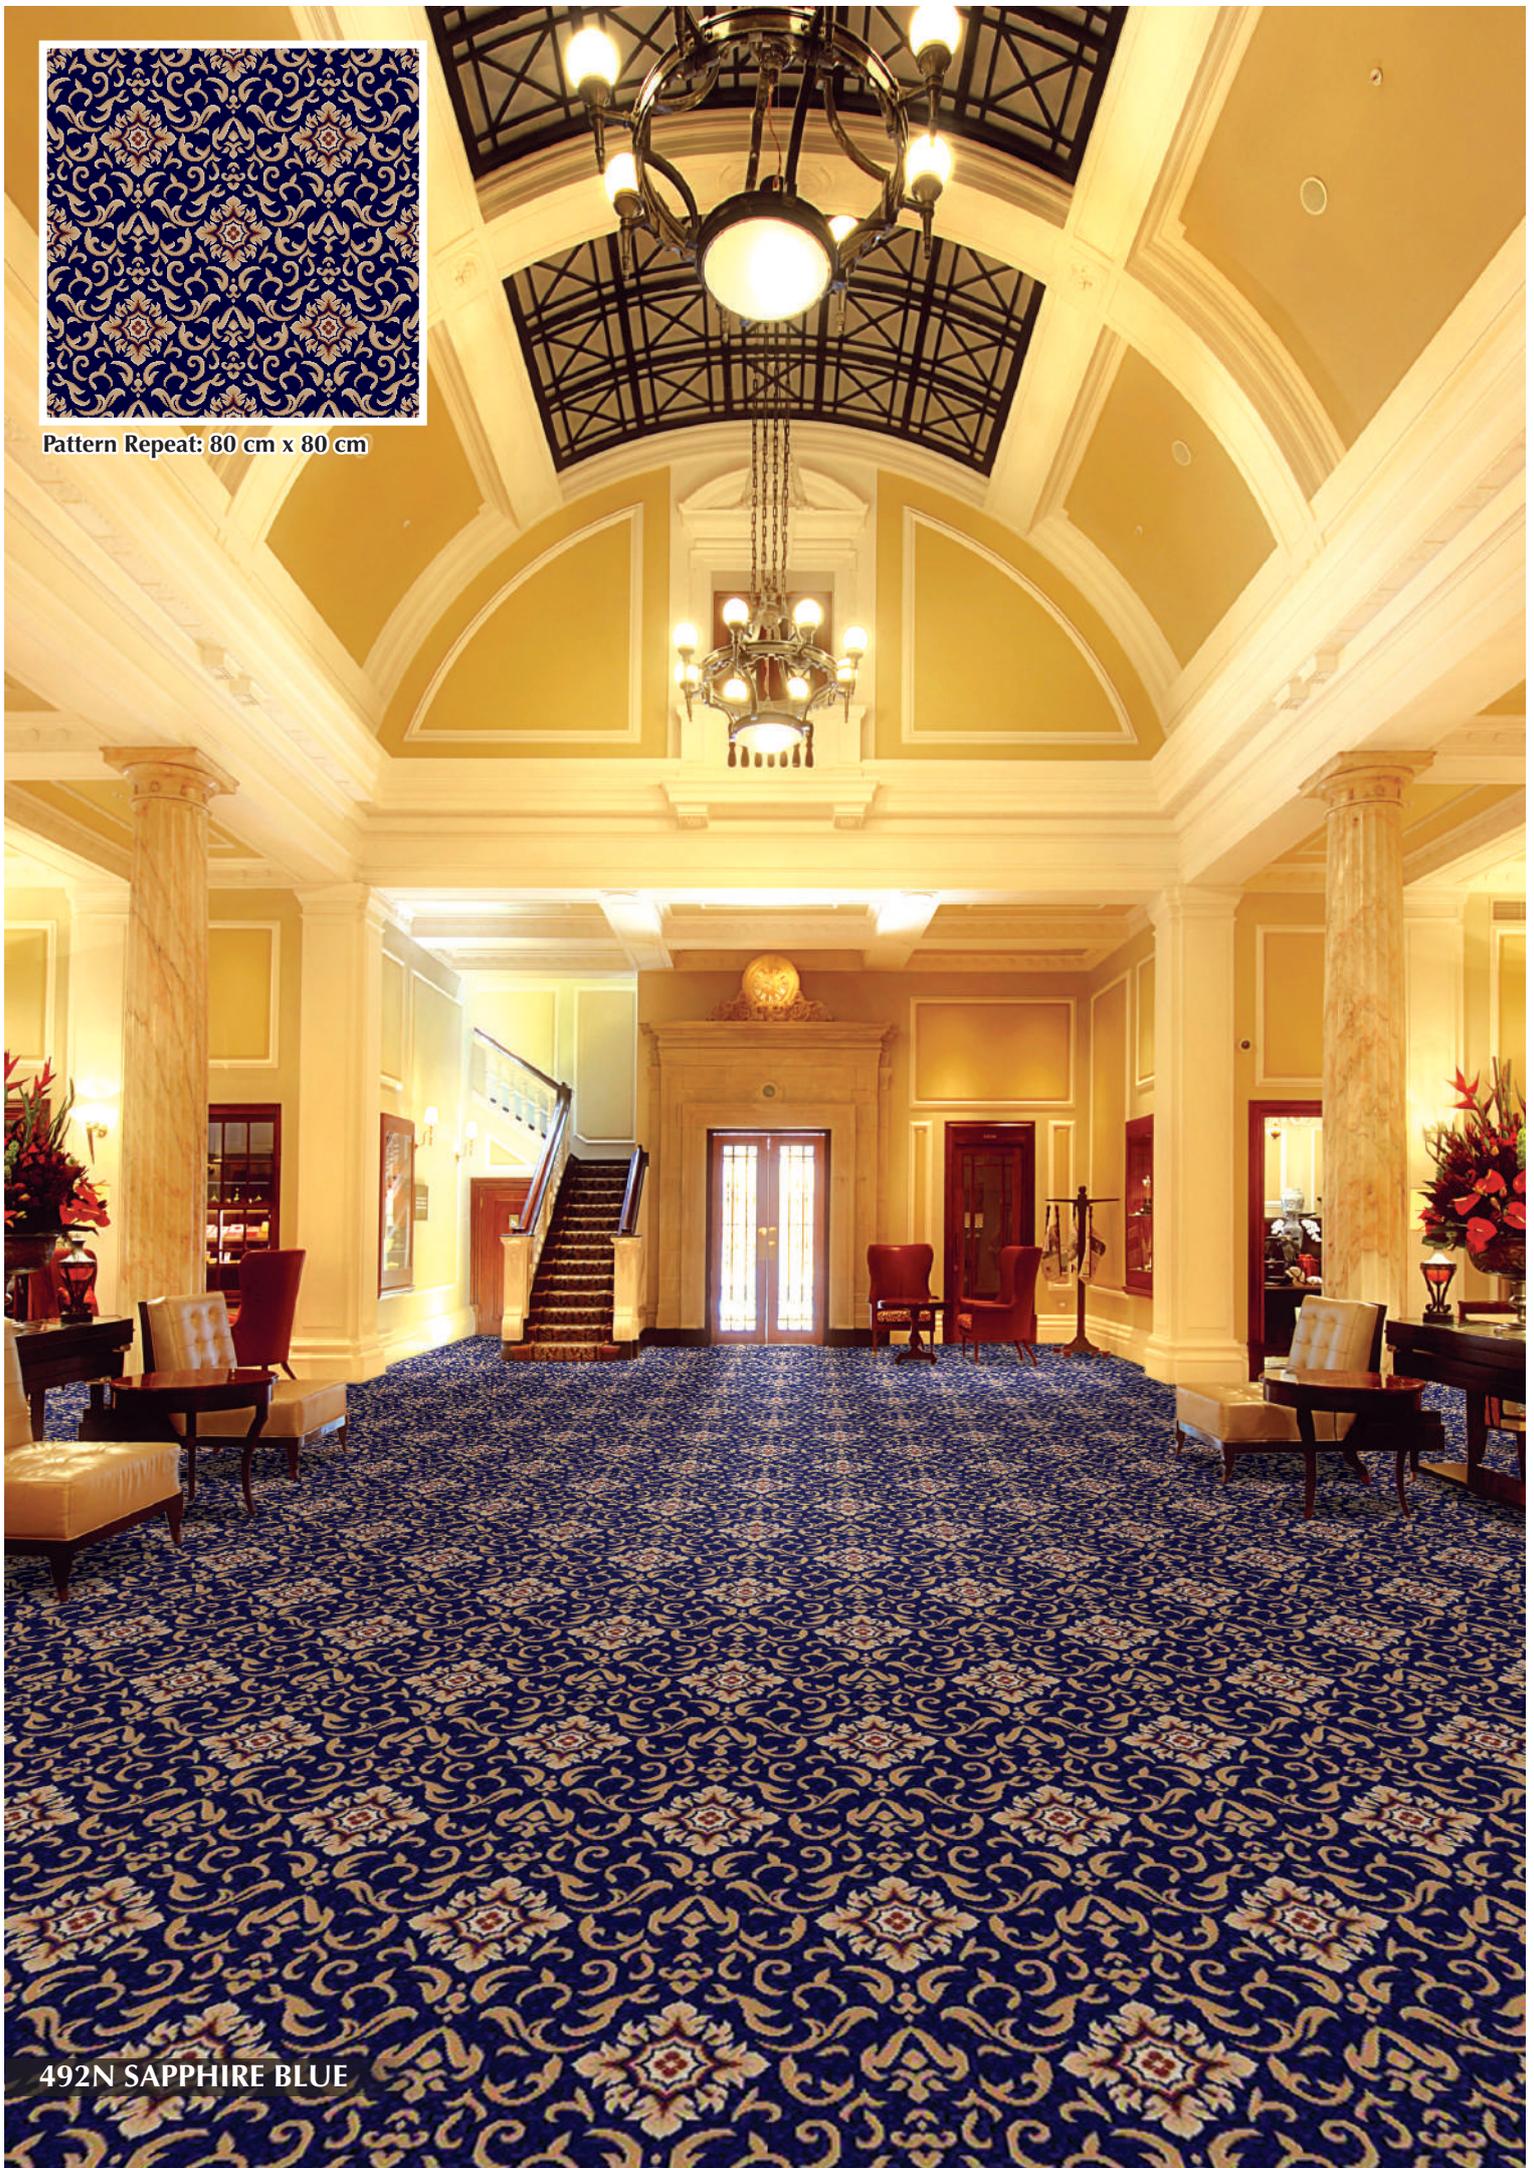

492N SAPPHIRE BLUE



Pattern Repeat: 100 cm x 100 cm


493R TOREADOR RED



Pattern Repeat: 133 cm x 166 cm



494B IMPRESSION BEIGE

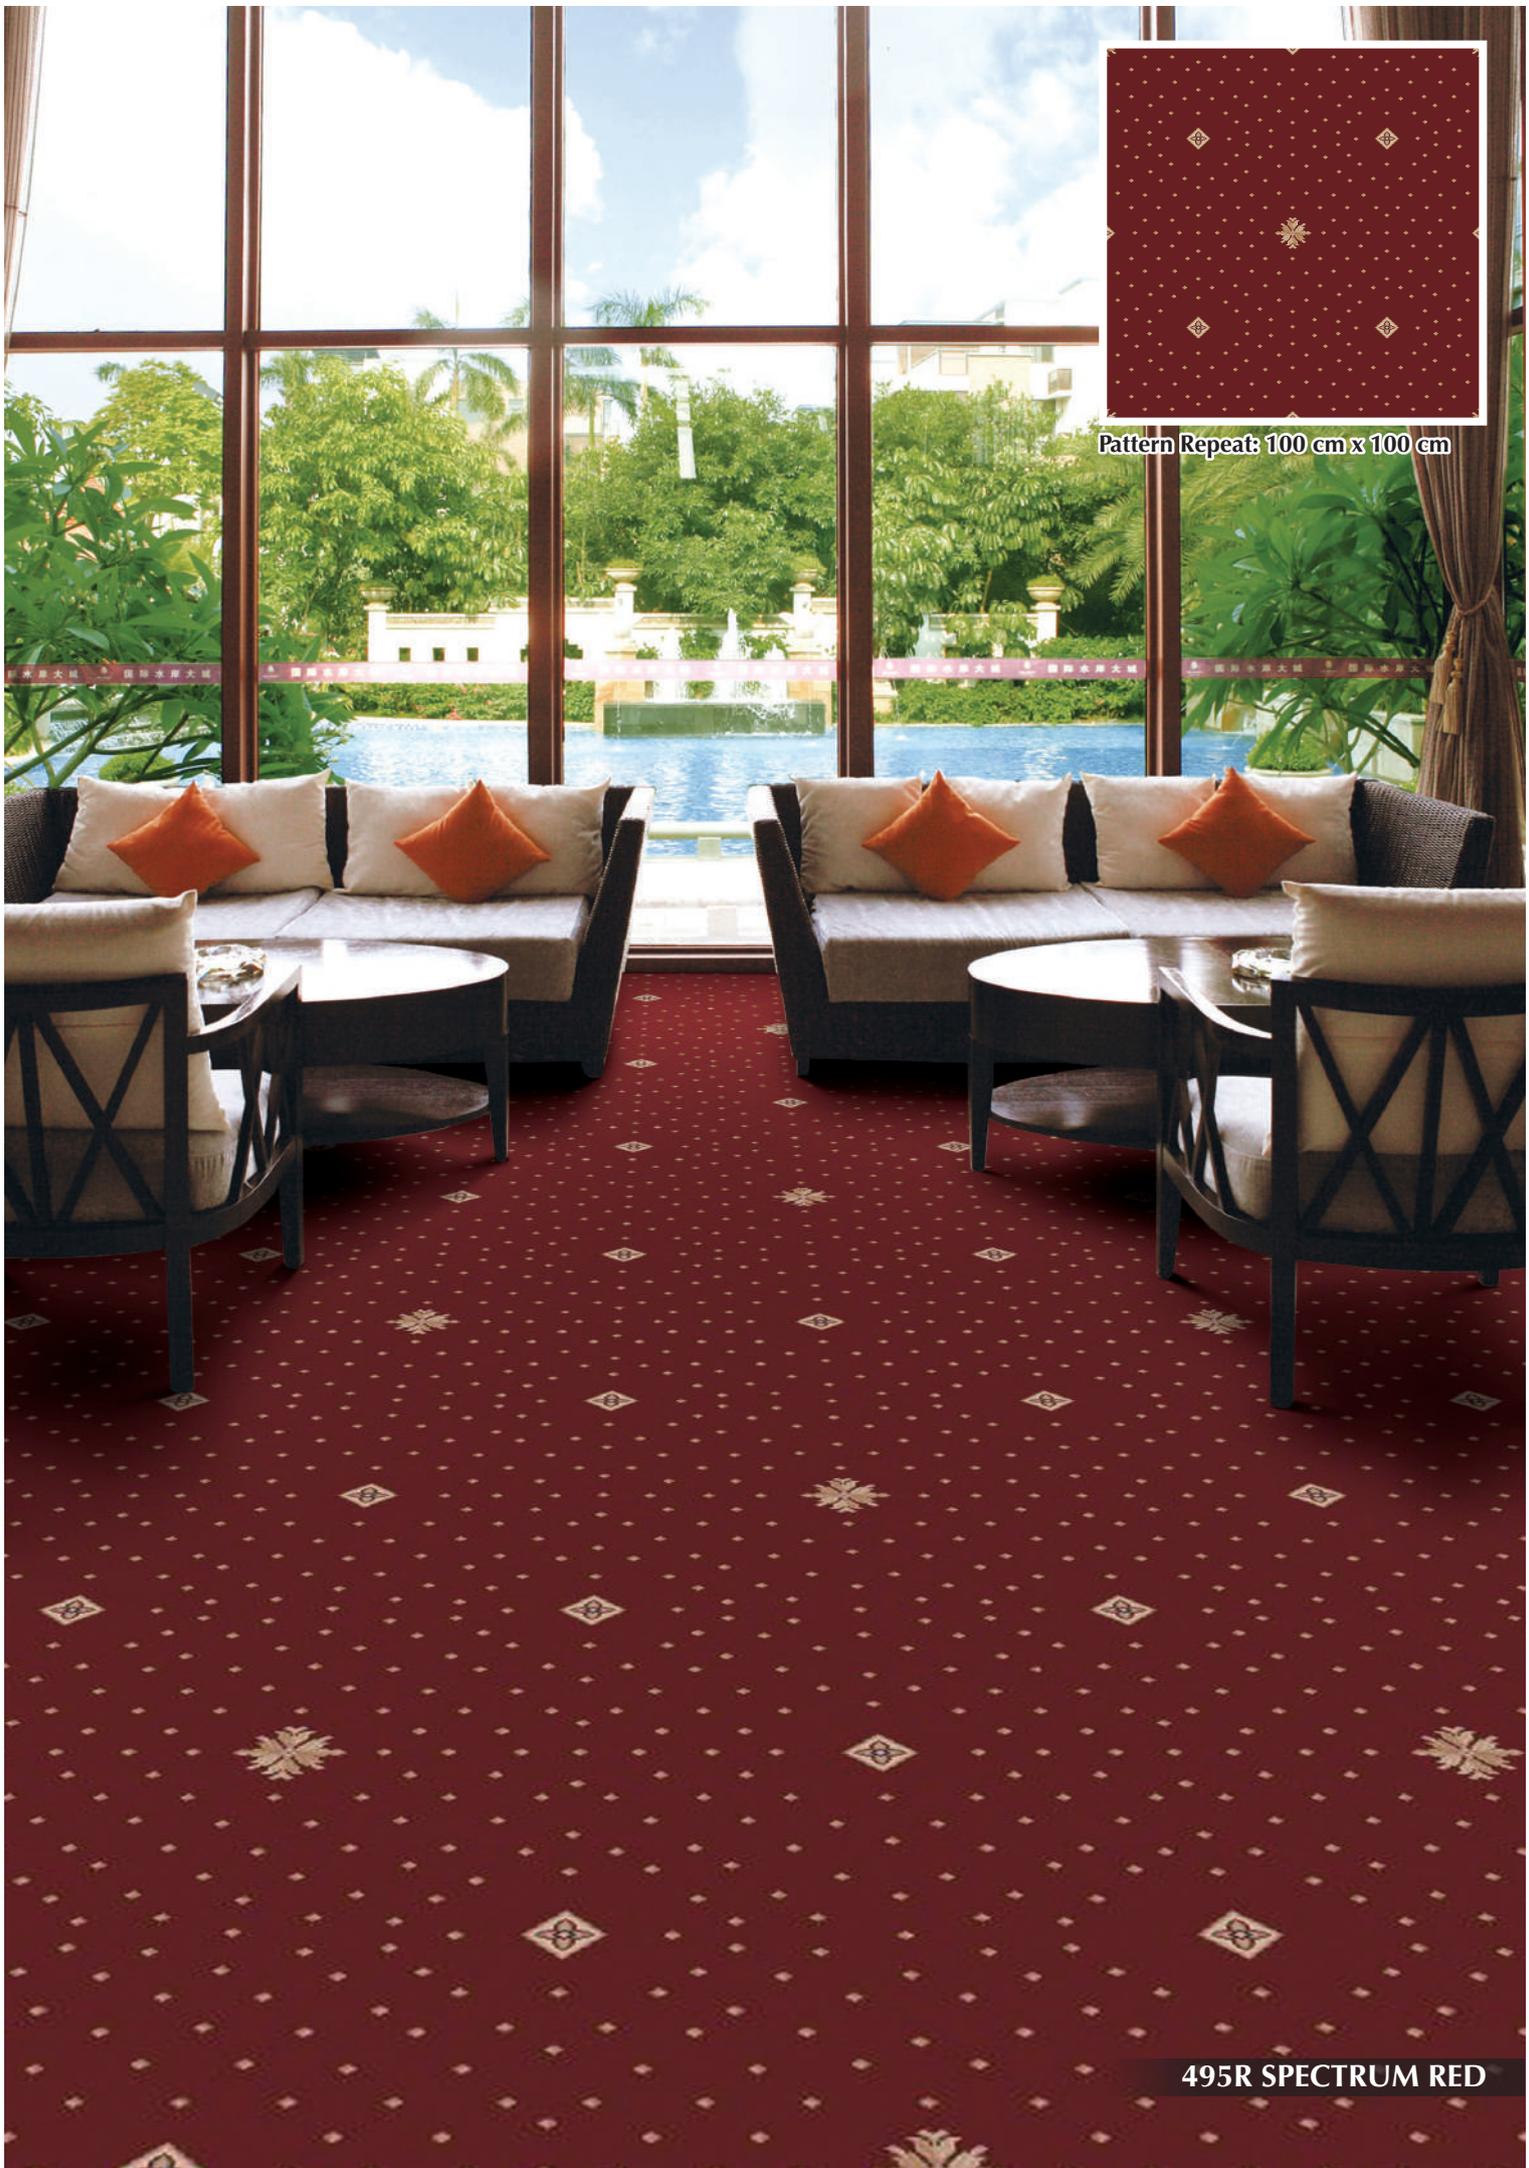

Pattern Repeat: 100 cm x 100 cm

495R SPECTRUM RED



Pattern Repeat: 100 cm x 100 cm





495N SPECTRUM BLUE



Pattern Repeat: 80 cm x 75 cm



496R DIVINE RED

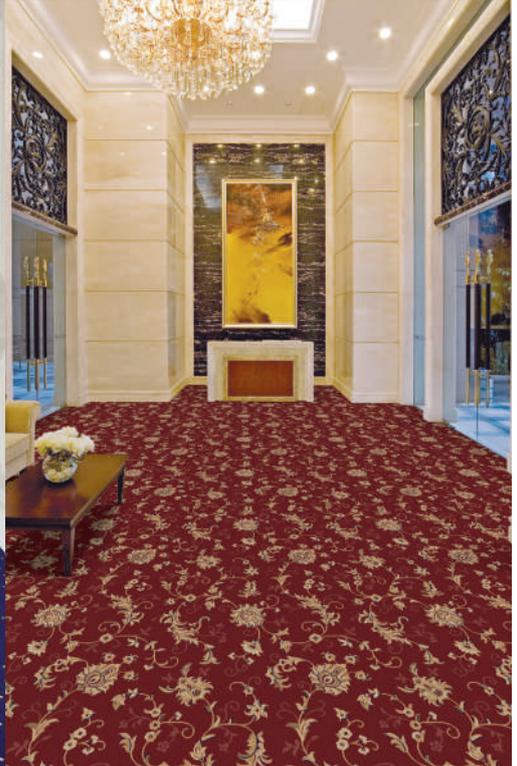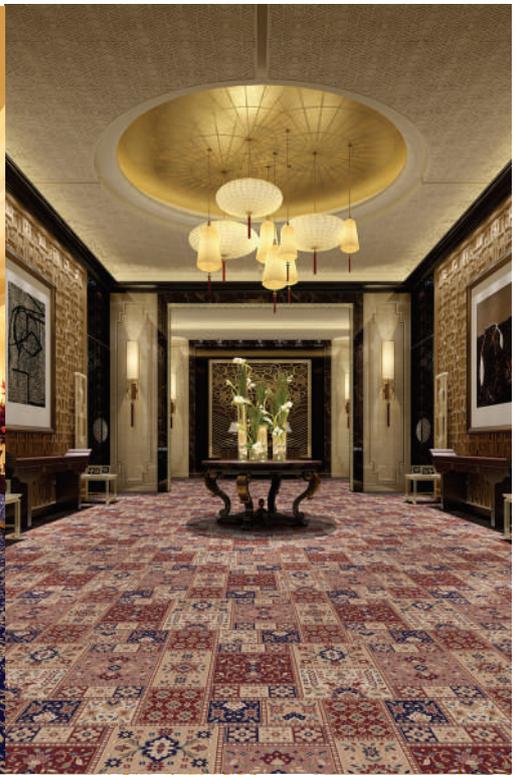

CLASSIQUE WILTON Specifications

Construction	Wilton Weave
Yarn Composition	100% Fine Heatset Polypropylene
Yarn Dtex	1600
Pile Weight	ca. 2100 g/m ² (62 oz/lyd ²)
Total Weight	ca. 2700 g/m ² (80 oz/lyd ²)
Pile Height	ca. 11.5 mm (+/- 0.5 mm)
Total Height	ca. 13.5 mm (+/- 0.5 mm)
Density	756,000 points/m ²
Standard Roll Size	4 m x 25 m

Warranties

10 Year Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Medium Hospitality Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dyelot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Control	Max. 4 kV (AATCC-134-1996)
Dimensional Stability	Pass - Max. 0.1% change (AACHEN)
Flammability	
Pill Test	Pass - 8 (ASTM-D-2859-06)
Smoke Density	Pass - Max. 450 (ASTM-E-662-06)
Colourfastness	
to light	Good (AATCC-16E)
to wet & dry cleaning	Good (AATCC-165)
to ozone	Excellent - 5 (AATCC-129)

MADE IN TURKEY



Cut



Broadloom

UC FLOOR

Elegance & Comfort in Modern Living