


LAVETTE





361 ANTHRACITE

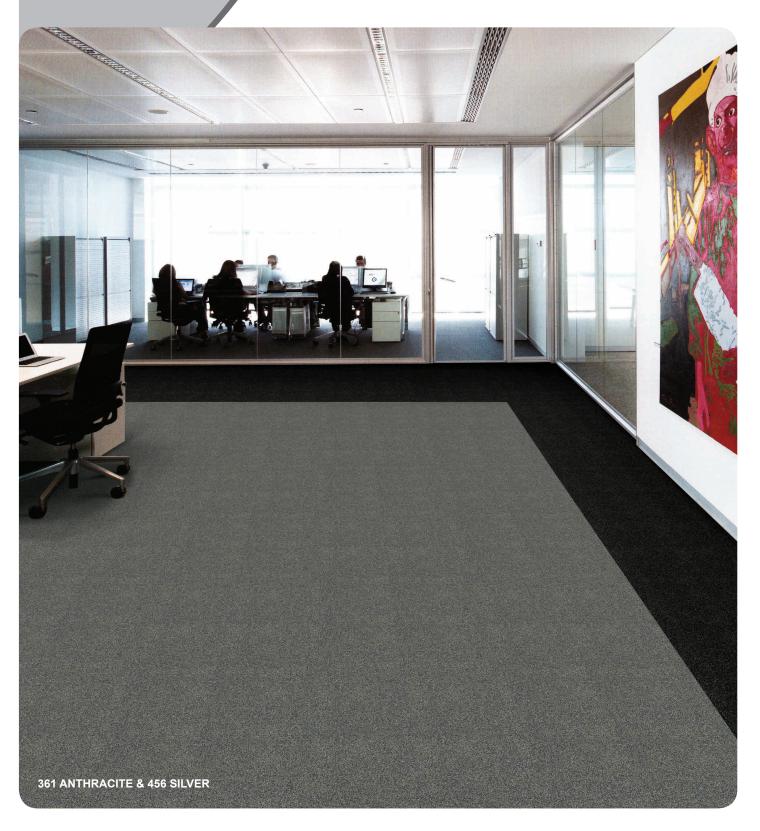

367 MEDIUM BEIGE



368 CARAMEL



456 SILVER



457 BROWN



501 BRIGHT RED



502 BURGUNDY



700 DARK BLUE



800 BLACK




Construction 1/10" Tufted Cut Pile Frieze Yarn Composition 100% Solution Dyed Nylon

Yarn Count 1440 / 2 ply

Pile Weight Ca. 1085 g/m² (32 oz/yd²) Total Weight Ca. 1950 g/m² (58 oz/yd²) Pile Height Ca. 5.7 mm (+/- 0.5 mm) Total Height Ca. 8.2 mm (+/- 0.5 mm) Stitch Rate 13 per inch

Density 5133 oz/yd3 Backing ActionBac® Standard Roll Size 3.66 m x 30 m

Stain, Oil & Water Resistance 3M Scotchgard™ Protector

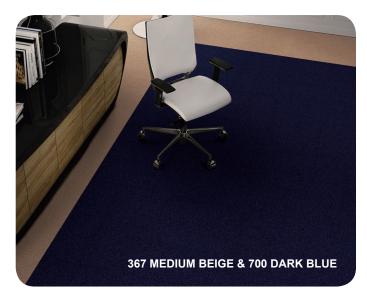



Rain, mud, snow. Dogs, kids, guests. There's always something coming for your carpet – but when your carpet has built-in Scotchgard™ Protection, you're ready for it all.

How it works The science behind the magic



Repels Spills stay on the surface.

Resists

What to know

What sets us apart

Dirt won't adhere to the fiber.



Deep down protection

Performance (as tested by ITTS Inc. USA)

Stain Resistance 7 (AATCC-175-2003)

Static Control Pass - Max. 4 kV (AATCC 134-1996)

Tuft Bind Pass - 3.3 lbs/y3

Dimensional Stability Pass - Max. 0.1% change (AACHEN) Flammability

Radiant Panel Pass - Class I (ASTM-E-2648-10) Pill Test Pass - 8 (ASTM-D-2859-96) Smoke Density Pass - Max. 450 (ASTM-E-662-06)

Colourfastness Excellent - 5 (AATCC-16E) to light to wet & dry crocking Excellent - 5 (AATCC-165) to Ozone Excellent - 5 (AATCC-129)

Warranties

10 Year Carpet Wear Warranty Lifetime Antishock Carpet Warranty

Ideal for Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant \boldsymbol{must} be used for all such installations. Due to dye lot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.









