




UC FLOOR

LONDON

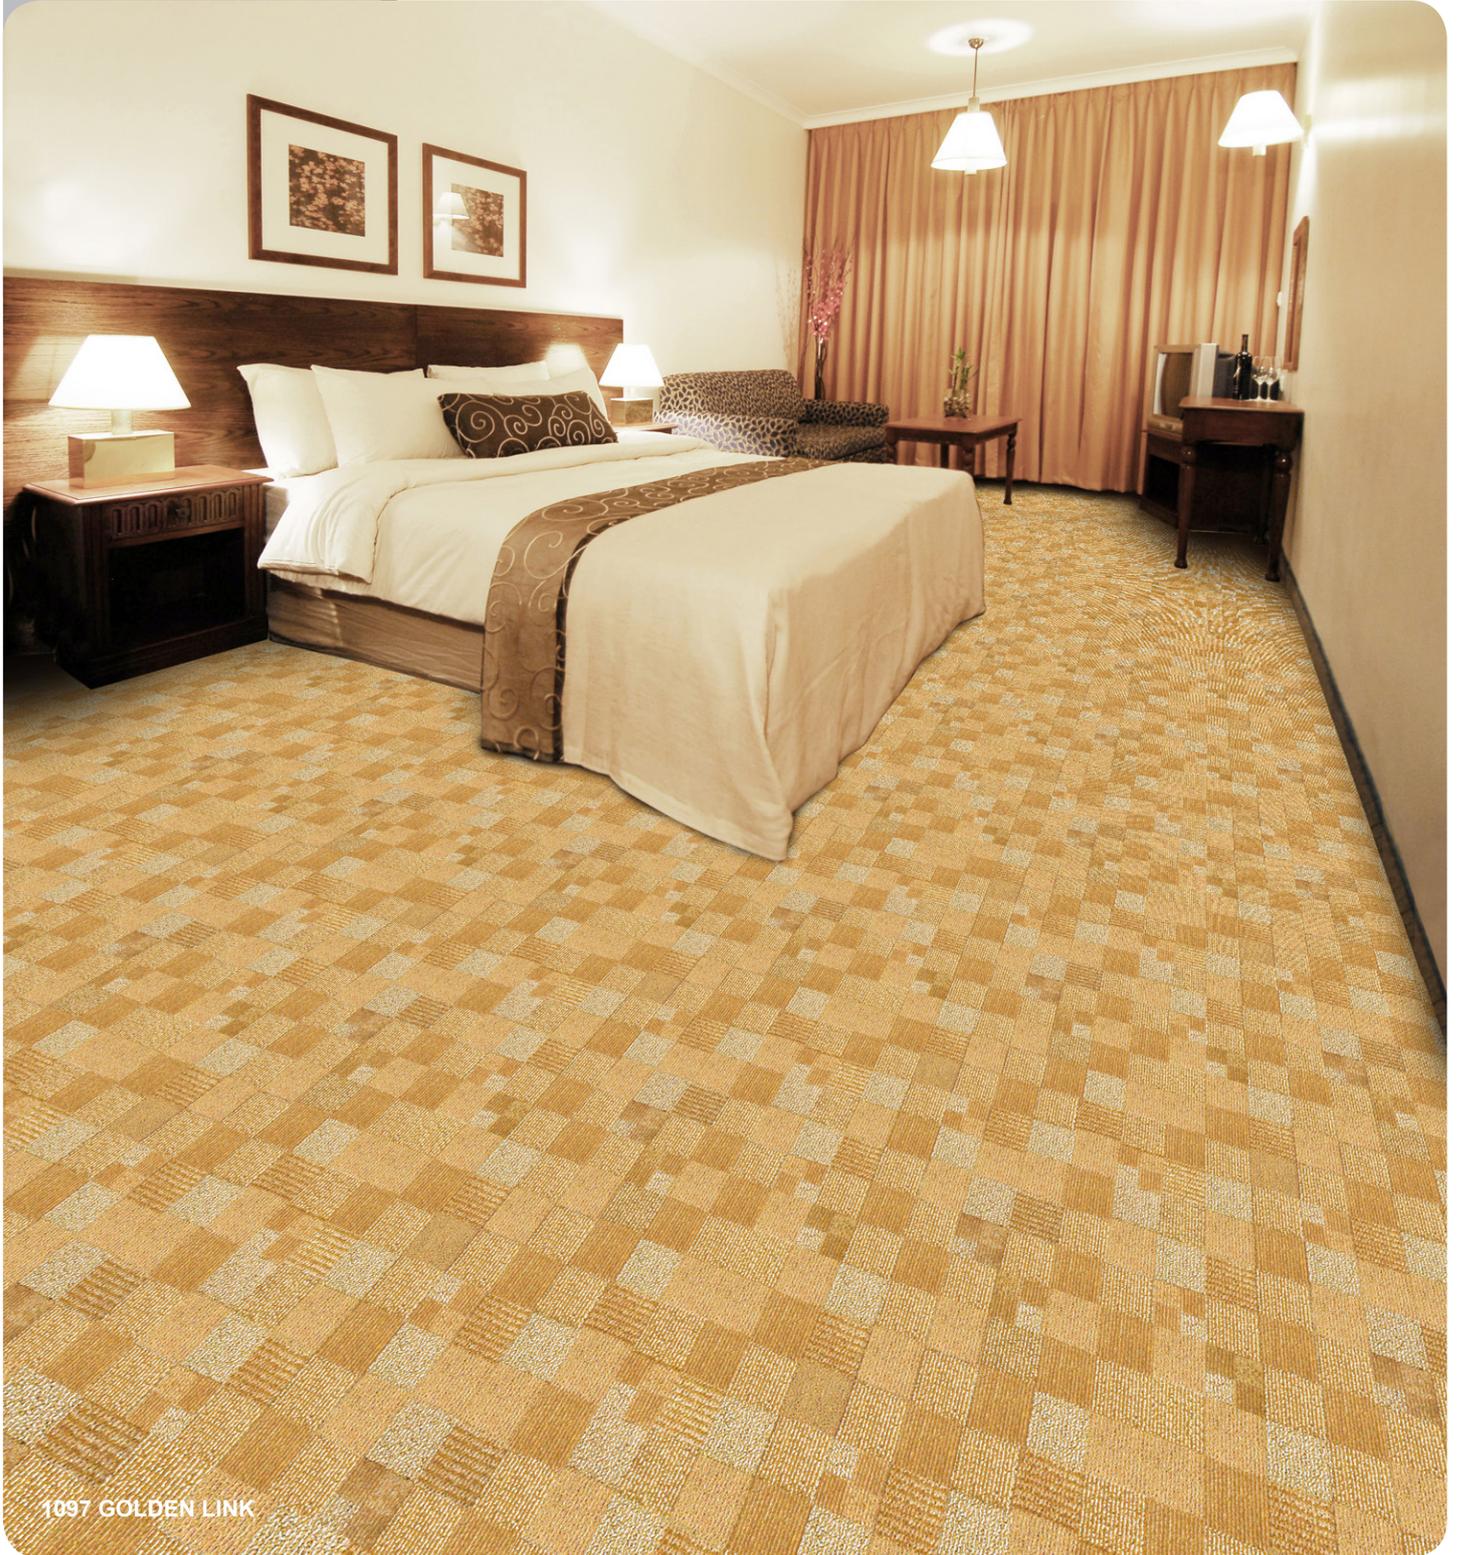

1097 GOLDEN LINK

CUT PILE PATTERNED

Please note: There may be slight color difference between the picture and actual carpet.



1041 COASTAL BROWN



1073 BLACK APPEAL



1041 COASTAL BROWN



1073 BLACK APPEAL



1097 GOLDEN LINK

LONDON Specifications

Construction	1/10" Tufted Cut & Loop Pattern
Yarn Composition	100% Solution Dyed Heatset Polypropylene
Pile Weight	Ca. 1150 g/m ² (34 oz/yd ²)
Total Weight	Ca. 2150 g/m ² (63 oz/yd ²)
Pile Height	Ca. 7.5 mm (+/-5%)
Total Height	Ca. 9.5 mm (+/-5%)
Density	169,850 tuft/m ²
Backing	ActionBac®
Standard Roll Size	3.66 m x 30 m
Pattern Repeat	61 cm (W) x 60 cm (L)

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Control	Pass - Max. 4 kV (AATCC 134-1996)
Tuft Bind	Pass - 4.9 lbs (ASTM-D-1335)
Dimensional Stability	Pass - Max. 0.2% change (AACHEN)
Flammability	
US Federal Flammability Std	Pass (CPSC FF1-70), (16 CFR 1630), (ASTM-D-2859)
Smoke Density	Pass - Max. 450 (ASTM-E-662-06)
Colourfastness	
to light	Excellent - 5 (AATCC-16E)
to wet & dry crocking	Excellent - 5 (AATCC-165)
to Ozone	Excellent - 5 (AATCC-129)

Warranties

5 Year Limited Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Residential and Hospitality Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant **must** be used for all such installations. Due to dye lot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.



Manufactured in U.A.E

LONDON