




Kindly check stock availability with us before confirming the order. *Discontinued design.



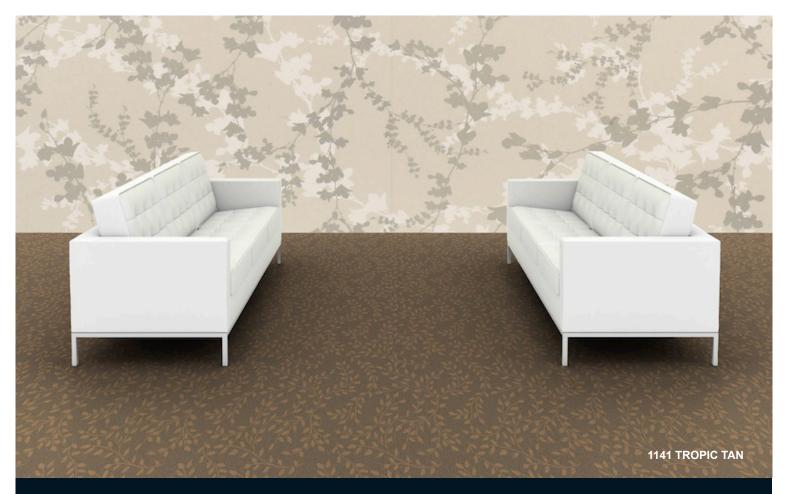

1114 FOREX GOLD



1141 TROPIC TAN



1173 ASPEN BLACK



1126 VINE RED



1148 SANDY BROWN



1193 LOAF BEIGE

LUCERNE Specifications

1/10" Tufted Cut & Loop Pattern 100% Solution Dyed Heatset Construction Yarn Composition Polyproyplene

Ca. 1150 g/m² (34 oz/yd²) Ca. 2150 g/m² (63 oz/yd²) Ca. 7.5 mm (+/-5%) Pile Weight Total Weight Pile Height Total Height Ca. 9.5 mm (+/-5%) Density 169,850 tuffs/m² Secondary Backing Standard Roll Size ActionBac® 3.66 m x 30 m

Performance (as tested by ITTS Inc. USA)

10 (AATCC-175-2003) Stain Resistance Static Control Built-in Permanant Tuft Bind 6.5 lbs (ASTM-D-1335) **Dimensional Stability**

Flammability

Pattern Repeat

US Federal Flammability Std

Smoke Density Colourfastness

to light to wet & dry crocking

to Ozone

Pass - Max. 0.2% change (AACHEN)

Pass (CPSC FF1-70), (16 CFR 1630), (ASTM-D-2859)

Pass - Max. 450 (ASTM-E-662-06)

Excellent - 5 (AATCC-16E) Excellent - 5 (AATCC-165) Excellent - 5 (AATCC-129)

91.5 cm x 91.5 cm

Warranties

5 Year Carpet Wear Warranty Lifetime Antishock Carpet Warranty

Ideal for Residential and Hospitality Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant \pmb{must} be used for all such installations. Due to dye lot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Manufactured in U.A.E



